

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/06/05'		

NOTES:




- MATERIAL
 - INSULATOR:PA-46(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1029-03


4. PRODUCT NUMBER CODE:

DS1029-03 - X X X X X X X X



- BEND TYPE
 - 1: R1 TYPE
 - 2: R2 TYPE
- DIM.A B H1 H2 YPE
 - 1: TYPE 1
 - 2: TYPE 2
- MOUNTING TYPE
 - S: SMT TYPE
- HOUSING COLOR
 - B:BLACK
- CONNECTOR PLATING
 - 8: FULL GOLD FLASH
- CONECT TYPE
 - P:PLUG
- No.OF CONTACTS
 - 1*1-1*40
- SERIES No.
 - DS1029-03

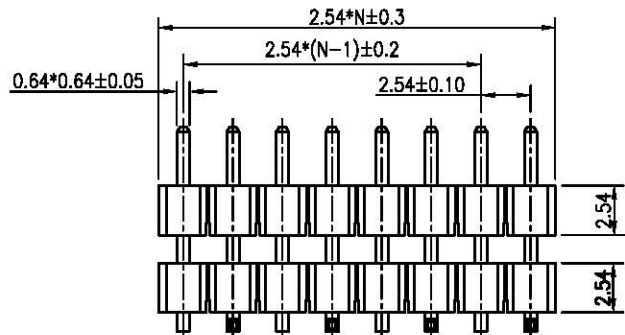

N: NUMBER OF CONTACTS



TYPE	DIM A	DIM B	DIM H1	DIM H2	LENGTH PIN
1	3.00	4.70	6.50	4.38	12.90
2	3.00	4.83	6.50	3.50	12.10
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					

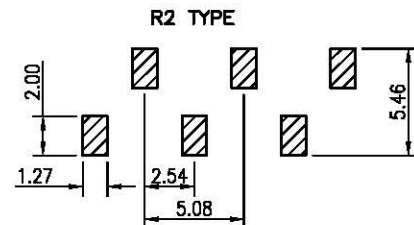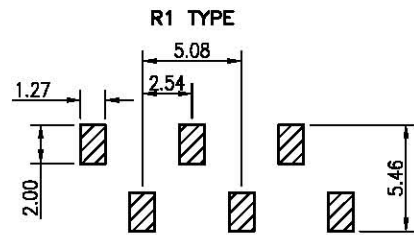

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		2.54mm PITCH PIN HEADER
.X	±0.38	.X	±3°	mm	SINGLE ROW S.M.T TYPE
.XX	±0.25	.XX	±2°	A4	SERIES DS1029-03 SERIES
DRAWING TYPE		CUSTOMER			
SCALE		SHEET		1 OF 1	
DRAWING NO.		C-DS1029-03-XXXXXXX			