

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ych 01/24/08'		

NOTES:




- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE:-45° to +110°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CONTACT RESISTANCE:20mΩ max.
 - CURRENT RATING:3A.

3. PART NUMBER: DS1023-12


4. PRODUCT NUMBER CODE:

DS1023-12 - X X X

- CONTACT PLATING
 - 8: Full glod flash
 - 0: Selective gold flash
- MOUNTING TYPE
 - V: V/T type
- No.of Contacts
 - 1*1 - 1*40

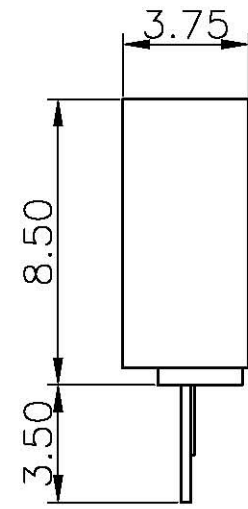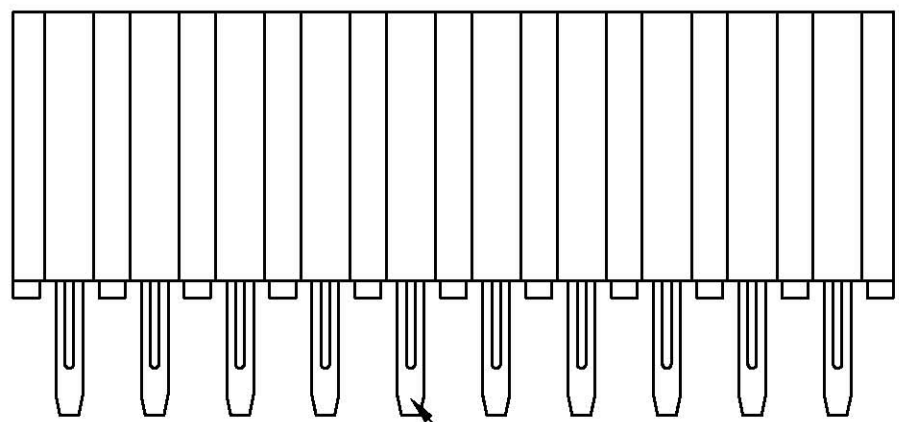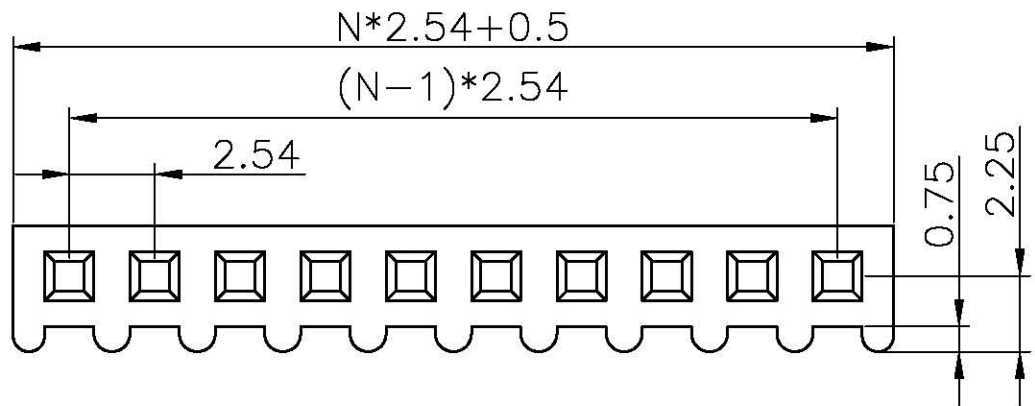

PIN 0.80*0.30

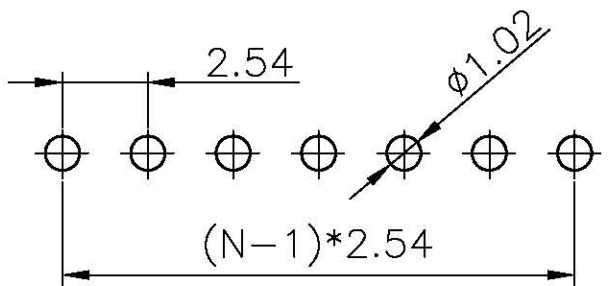

RECOMMEND PCB LAYOUT
(TOLERANCE= ± 0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH
X.	± 0.60	X.	$\pm 5^\circ$	UNITS	mm		2.54mm V/T TYPE H=8.5mm
.X	± 0.38	.X	$\pm 3^\circ$	SHEET SIZE	A4	SERIES	DS1023-12 SERIES
.XX	± 0.25	.XX	$\pm 2^\circ$				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1023-12-XXX					