


$N = \frac{1}{2}$ NUMBER OF CONTACTS

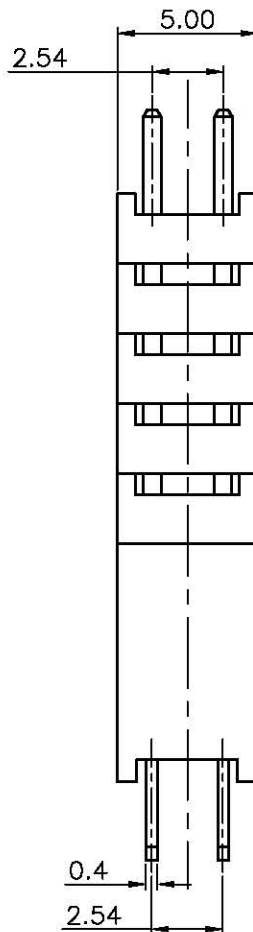


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/07/07'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 50mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PRODUCT NUMBER CODE:

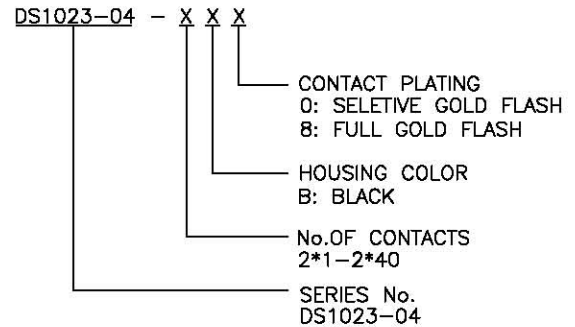

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	Female Header with Pin Header
X. ±0.60	X. ±5°	UNITS	mm		pitch 2.54mm V/T Stack TYPE
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1023-04 SERIES
.XX ±0.25	.XX ±2°				
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1023-04-XXXXXX				