


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/10/08'	~	

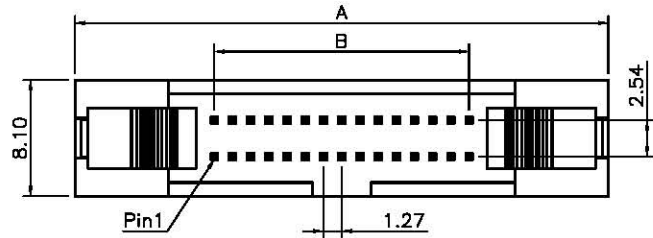

ACCESSORIES	X	Y
LONG LATCH	19.0	10.65
SHORT LATCH	17.5	8.0

NOTES:

1.MATERIALS

- . Contact: copper alloy
- . Insulation: PBT (UL 94V-0)



2.SPECIFICATION

- . Storage Temperature:-20~70°C
- . Operating Temperature:0~85°C
- . Contact Resistance:30mΩ max.(initial)
- . Insulation Resistance:1,000MΩ min
- . Dielectric Withstanding Voltage:AC 250V Per Minute


3.PRODUCT NUMBER CODE:

DS1011-04 - X X X X X


- Housing Color
B: Black
L: Blue
A: Gray
- Contact Plating
B: Full Gold Flash
- Ejector Type
L: Long Latch
S: Short Latch
- Mounting Type
V: V/T
- No.of Contacts
10 20 26 30 34
40 50 60 68
70 80 90 100
- Series No
DS1011-04

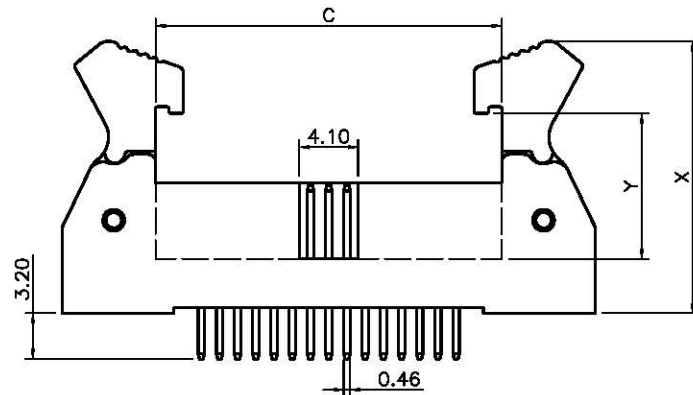

PINS PER ROW	A	B	C
5	24.50	5.08	11.46
10	30.85	11.43	17.81
13	34.66	15.24	21.26
15	37.20	17.78	24.16
17	39.74	20.32	26.70
20	43.55	24.13	30.51
25	49.90	30.48	36.86
30	56.25	36.83	43.21
34	61.33	41.91	48.29
35	62.60	43.18	49.56
40	68.95	49.53	55.91
45	75.30	55.88	62.26
50	81.65	62.23	68.61

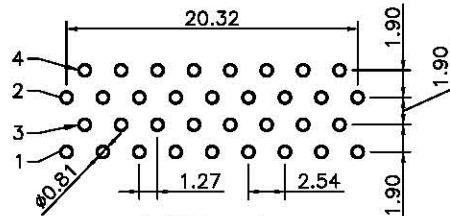

P.C.B Layout
(TOLERANCE=±0.05)
For Positions
10,26,30,34,50,70,90

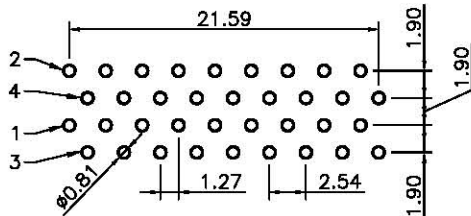

P.C.B Layout
(TOLERANCE=±0.05)
For Positions
20,40,60,68,80,100

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	SHROUDED HEADER PITCH 1.27*2.54mm
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1011-04

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1011-04-XXXXX-A		

广东中南电子电器有限公司

www.zn-cn.com