

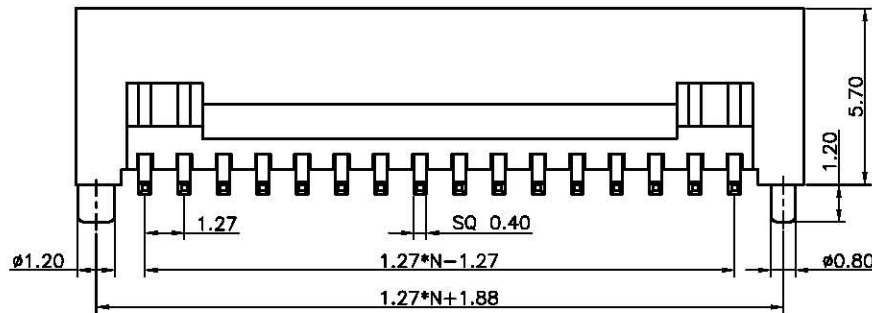


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | YCH 09/04/08' | ~ | |
| | | | | |
| | | | | |

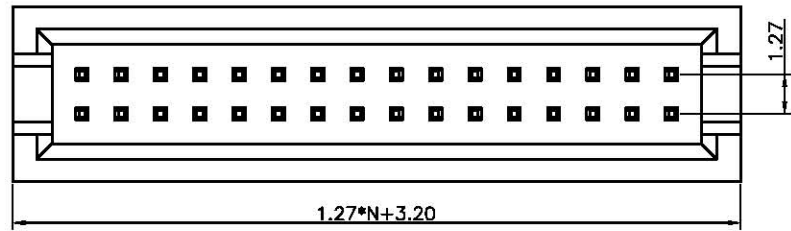

NOTES:


- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-45°C TO+110°C.

3. PART NUMBER: DS1031-14

4. PRODUCT NUMBER CODE:

DS1031-14 - X X X X

- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- MOUNTING TYPE
S:SMT TYPE
- No.OF CONTACTS
06 ~ 40

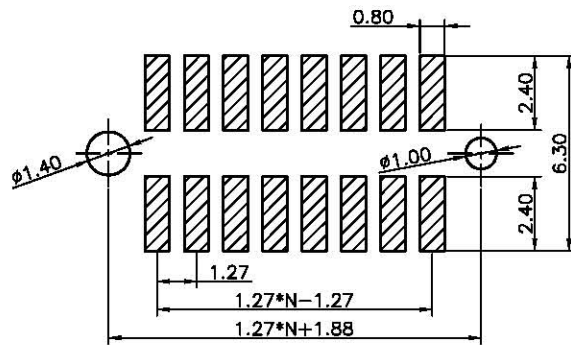

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

| | | | | | | | | |
|-------------------|-------|-------------------|--------|---------------------------|----|--------|--|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 1.27mm HEADER PITCH SMT TYPE W/POST | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | | | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1031-14 SERIES | |
| .XX | ±0.25 | .XX | ±2° | 广东中南电子电器有限公司 zn-cn.com | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | | |
| SCALE | 1:1 | SHEET | 1 OF 1 | | | | | |
| DRAWING NO. | | C-DS1031-14-XXXXX | | | | | | |