

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	

NOTES:





- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.0 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:300VAC.
  - CONTACT RESISTANCE:30mΩ Max.
  - OPERATING TEMPERATURE:-45°C TO+110°C.

3. PART NUMBER: DS1031-13

4. PRODUCT NUMBER CODE:

DS1031-13 - X X X X X

- DIM. C  
1:7.60mm
- HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH  
6: FULL TIN
- MOUNTING TYPE  
S:SMT TYPE
- No.OF CONTACTS  
2\*3-2\*40

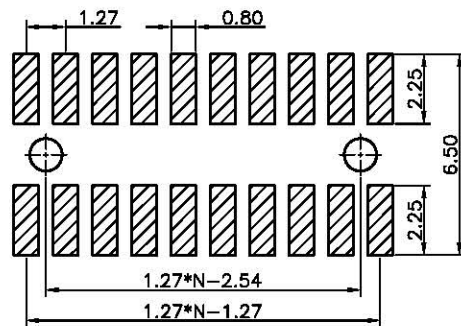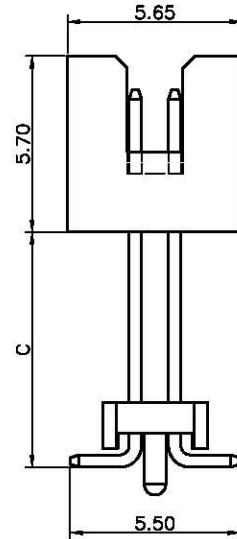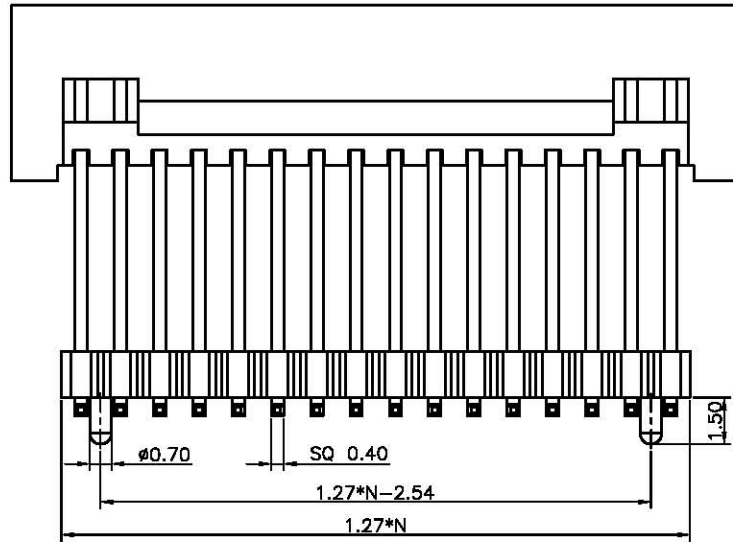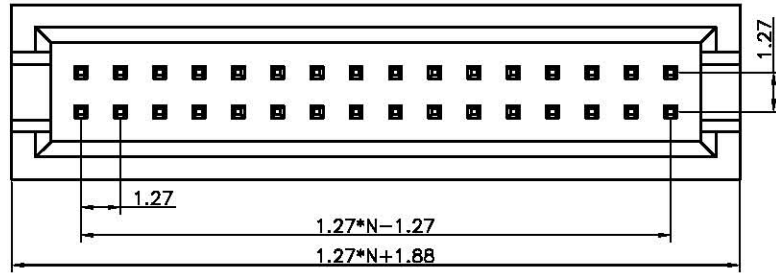

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm PIN HEADER SMT TYPE STACK SERIES	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1031-13 SERIES	
.XX	±0.25	.XX	±2°	广东中南电子电器有限公司 zn-cn.com				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1031-13-XXXXXX						